


IO16RS I/O module

Datasheet

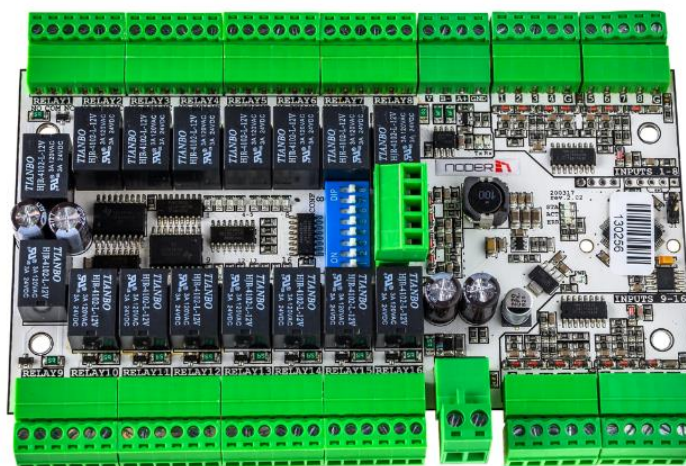

-  16 outputs
-  16 inputs
-  RS-485 communication with controller

NODER S.A.
Olszańska 5H street
31-513 Cracow, Poland

www.noder.pl/en

Extension module

Characteristic	
COOPERATION WITH CONTROLLERS	NODER EE12 NODER EWE4 NODER EWE4-LCD
NUMBER OF SUPPORTED FLOORS	16
NUMBER OF EXTENSIONS PER CONTROLLER	1-4
NUMBER OF EXTENSIONS PER ELEVATOR	1-4
NUMBER OF SUPPORTED FLOORS PER SINGLE CONTROLLER	1-64

Technical Specifications	
NUMBER OF PROGRAMABLE OUTPUTS	16
MAXIMUM CURRENT PER OUTPUT	1A
NUMBER OF PROGRAMABLE INPUTS	16
COMMUNICATION WITH CONTROLLER	1 x RS-485
POWER SUPPLY	12V DC
ENERGY CONSUMPTION	approximately ~200mA (max. ~337mA)
DIMENSIONS	151 x 105 x 23mm (5,94 x 4,13 x 0.91in)
WEIGHT	300g (0.66lb)
WORKING TEMPERATURE	-10 °C - +55 °C
STORAGE TEMPERATURE	-20 °C - +70 °C
AMBIENT RELATIVE HUMIDITY	<80%
NORMS	CE